

Tri-Band Wireless Adjustable Signal Booster



3G – 4G Home/Office Signal Booster Kit
TRIFLEX-A for AT&T 2G thru 4G
(TRIFLEX-A)

User Guide

TRIFLEX-A HOME/OFFICE KITS

| | |
|------------------------------------|-----------|
| <u>INTRODUCTION</u> | <u>2</u> |
| <u>PRINCIPLES OF OPERATION</u> | <u>2</u> |
| <u>SURECALL TRIFLEX PACKAGES</u> | <u>3</u> |
| <u>TRIFLEX BOOSTER HARDWARE</u> | <u>4</u> |
| <u>INSTALLATION</u> | <u>5</u> |
| <u>PACKAGE CONTENTS</u> | <u>5</u> |
| <u>SITE SELECTION</u> | <u>5</u> |
| <u>CONFIGURING GAIN SETTINGS</u> | <u>6</u> |
| <u>INSTALLATION INSTRUCTIONS</u> | <u>7</u> |
| <u>TROUBLESHOOTING</u> | <u>10</u> |
| <u>FREQUENTLY ASKED QUESTIONS</u> | <u>12</u> |
| <u>OBTAINING TECHNICAL SUPPORT</u> | <u>12</u> |
| <u>WARRANTY</u> | <u>13</u> |
| <u>SPECIFICATIONS</u> | <u>15</u> |
| <u>SAFETY INFORMATION</u> | <u>16</u> |

Congratulations on purchasing the SureCall Triflex - A kit for 2G-3G, all carriers, and 4G LTE for AT&T, the finest cellular signal booster available!

SureCall adjustable cellular boosters and kits remove the frustration over dropped calls, limited range, and slow data rates by amplifying incoming and outgoing cellular signals in buildings, offices, and homes. The Triflex is designed with leading-edge technologies to detect and amplify weak incoming signals your cellular device would otherwise miss and to broadcast a significantly stronger signal back to the cell tower.

This guide contains all the information you need to get your SureCall Triflex booster system up and running.

Principles of Operation

The SureCall Triflex is a high-quality bidirectional signal booster that boosts cellular signals for areas prone to weak or shadowed cellular coverage.

The Triflex works with two antennas:

- × An inside antenna that communicates with your cell phone.
- × An outside antenna that communicates with the cell tower.

Signals sent from a cell tower are received by the outside antenna, amplified by the booster and then sent to your phone via the inside antenna.

When your phone transmits, the signal is sent to the inside antenna, and then sent to the cell tower via the outside antenna.

Some cell signal is required for the Triflex to enhance cellular signal coverage. The weakest cell signal for the Triflex to work is low -100dBm to high -90dBm. dBm is an abbreviation for the power ratio in decibels of the radio power per one milliwatt.

To measure your existing cell signal on an Apple iPhone, dial ***3001#12345#*** and press **Call**. In the top-left corner, a number appears instead of bars.

For Android devices, you can download several apps to measure exact signal strength. Look up **check real signal strength** to find a cell signal measurement app.

SureCall Triflex Packages

Triflex Antenna Kitting Information

| Component | Prod No. (Description) | Gain/Loss | | |
|------------------|------------------------|-----------|----------|----------|
| | | LTE-A | 800 MHz | 1900 MHz |
| Outdoor Antennas | CM288W | 3dBi | 3dBi | 4dBi |
| | CM230W | 10dBi | 10dBi | 10dBi |
| Outdoor Cable | CM240-40FN (40 Feet) | -3.52 dB | -3.98 dB | -6.52 dB |
| | CM400-75NN (75 Feet) | -4.22 dB | -4.41dB | -6.17 dB |
| Indoor Cable | CM240-20FN (20 Feet) | -2.06 dB | -2.29 dB | -3.56 dB |
| | CM400-30NN (30 Feet) | -2.05 dB | -2.12 dB | -2.83 dB |
| Indoor Antenna | CM248W | 7dBi | 7dBi | 10dBi |
| | CM222W | 3dBi | 3dBi | 6dBi |


Note: For the signal booster to work, the following items are required:

- × Outside antenna
- × Cable for connecting the outside antenna to the booster
- × Signal booster
- × Inside antenna
- × Cable for connecting the inside antenna to the booster
- × Power supply

Warning: Unauthorized antennas, cables, and/or coupling devices are prohibited by FCC new rules. Please contact FCC for details: 1-888-CALL-FCC.

Triflex Booster Hardware

The following figure shows the key hardware components on the Triflex 65dB cellular booster. Refer to this figure as you install your SureCall TriFlex components.

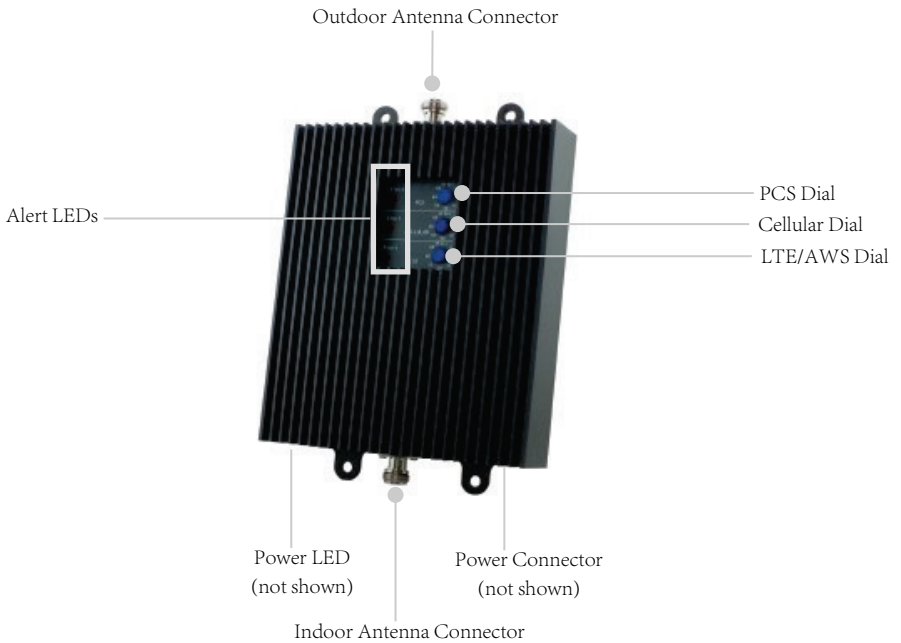

Package Contents

Unpack all package contents and check for damage. For missing or damaged items, contact your reseller. Keep the carton and packing material to store the product or if you need to return it.

Site Selection


For optimum performance, select a location for your outside antenna that:

- × Provides the best signal strength possible.
- × To measure your existing cell signal on an Apple iPhone, dial *3001#12345#* and press Call. In the top-left corner, a number appears instead of bars. For Android devices, you can download several apps to measure exact signal strength. Look up “check real signal strength” to find a cell signal measurement app.
- × Avoids areas where wireless signals can be blocked or reflected by buildings, walls, trees, hills, and other terrain features. This can result in low signal strength.
- × Is not close to energy-efficient windows, which can affect signal penetration into a home or office.

Note: The cell phone tower site in relation to the location where you install your outside antenna also determines signal strength. Although cell phone providers try to place towers for maximum coverage, local ordinances and terrain features can restrict tower locations, which can limit signal strength at your location.

Configuring Gain Settings

1. Facing the front of your booster, find the **PCS**, **Cellular**, and **LTE / AWS** dials on the top of the booster (see page 4).
2. Set the following dials according to the coverage area and the distance between the indoor and outdoor antennas (see the table below).



| If Coverage Area is... | and Antenna Separation is... | Set All Dials to... |
|----------------------------|------------------------------|-------------------------|
| 3000 - 6000 square feet | 60 - 80 feet | 65 (default setting) |
| 2000 – 4000 square feet | 50 – 75 feet | 60 |
| 1500 – 2000 square feet | 40 - 60 feet | 55 |
| 1000- 1500 square feet | 35 – 50 feet | 50 |
| 1000 square feet and below | 30-35 feet | 45 or below |

Note: As you can see from the table above, acquiring the recommended indoor and outdoor antenna separation optimizes coverage significantly. Any reduced antenna separation reduces the booster’s cellular signal capabilities.

Installation Instructions

The Triflex booster is suited for installation in a building or home.


Step 1: Connect the Outside Antenna

1. Mount the fiberglass antenna in an outside mounting location that:
 - × Has at least a 12-inch radius clear of obstructions and other radiating elements.
 - × Is at least 75 feet in a straight line from the inside antenna when used in an area prone to weak cellular signals and operating the booster at full 65dB gain.
 - × Is not co-located or operating with any other antenna or booster.
2. Using the CM240 or CM400 cable, connect the outside antenna to the booster connector marked **OUTSIDE** (see page 4).
3. Hand tighten the connection.

IMPORTANT: A minimum separation distance of 30 vertical feet is necessary between the outside and inside antennas. If the inside coverage is not sufficient, you may need as much as 80 feet of separation. See the table on the previous page.

Step 2. Connect the Inside Antenna

1. Mount the inside antenna:
 - × Omni dome antenna: mount the antenna on the ceiling in a central location where you want reception.
 - × Panel antenna: install the antenna against a wall or surface projecting where you want reception.

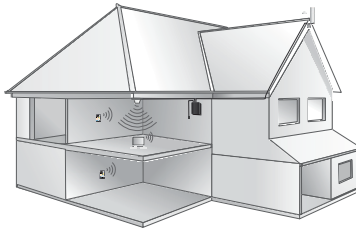

2. Using the CM240 or CM400 cable, connect the inside antenna to the booster connector marked **INSIDE** (see page 4).
3. Hand tighten the connection.

Step 3. Mount the Booster (Optional)

1. Select a location for your booster.
2. Clean the intended surface and allow it to dry.
3. Peel the protective paper from the back of the hook sides of the Velcro. Press the adhesive side of the Velcro strips into place on the bottom of the booster, one strip on each end.
4. Wait 5 minutes, and then attach the loop side of the Velcro to the hook side. The adhesive bond reaches maximum strength after 24 hours.
5. With both the Velcro loop and hook pieces attached to the back of the booster, peel the protective paper off of the back of the loop strips.
6. Press the entire booster into its mounting place, and then wait 5 minutes for the adhesive to set.
7. Be sure the booster is seated firmly.

To remove the booster, rotate it across the Velcro. Do not pull the booster or cables.

Step 4. Connect to AC Power

1. Connect the AC power cord to the booster (see page 4).
2. Connect the plug on the other end to a 110V AC power outlet. Be sure all connections to the booster are tight and secure.
 - × The booster turns on automatically.
 - × The **Power** LED goes ON to show that the booster is ready for use (see page 4).
 - × The **Alert** LEDs flash up to 15 seconds on each band to show the band is activated (see page 4).

The booster is rated for 5-20V input voltage. DO NOT use the booster with a higher voltage power supply. This can damage the booster, cause personal injury, and void your warranty.

In the unlikely event you encounter a problem, use the following steps to identify and resolve the issue.

| Problem | Resolution |
|--|--|
| Booster has no power | <ol style="list-style-type: none"> 1. Verify that the switch on the power supply is turned on and red LED is ON. 2. Connect the power supply to an alternate power source. 3. Be sure the power source is not controlled by a switch that can remove power from the outlet. 4. Check the green POWER LED on the booster. If it is OFF, return the power supply to SureCall. Contact tech support at 1-888-365-6283, email support@surecall.com, or go to surecall.com and log on via online support to receive a Return Merchandise Authorization (RMA). |
| After installing the booster system, you have no signal or reception. | <ol style="list-style-type: none"> 1. Check the strength of the outside signal as close as you can to the outside antenna. To measure your existing cell signal: Apple iPhoneD: dial *3001#12345#*and press Call. In the top-left corner, a number replaces the bars. Android devices: download apps to measure exact signal strength, such as Network Signal Info in the Google Play store. Search "check real signal strength" to find other cell signal measurement apps. 2. Double-check all booster and antenna cable connections . 3. Be sure your booster's dB gain is turned up to full power on each dial. |
| One of the red lights next to the dials on your booster is flashing red. | <ol style="list-style-type: none"> 1. Turn down the dB gain on the dial until the light goes OFF or turns yellow. 2. Be sure the inside panel antenna is facing away from the outside antenna. 3. Use the recommended antenna separation: <ul style="list-style-type: none"> · 65dB — 60 ft. separation · 63dB — 50-60 ft. separation · 55dB — 40-50 ft. separation · 50dB — 30-40 ft. separation · 45dB — 20-30 ft. separation · 40dB — 10-20 ft. separation · 35dB — 10 ft. separation |

| Problem | Resolution |
|--|--|
| Your booster restarted and shut down for 15 minutes, and is now shut down permanently. | Each SureCall booster is equipped with Auto Shutdown to prevent cell tower interference. The outside antenna may be close to a cell tower. Move the outside antenna to a location that provides sufficient distance from the cell tower to prevent the booster from automatically enabling Auto Shutdown. Once away from the original location, perform the procedure under Step 4. Connect to AC Power on page 9. |
| The red LED goes ON. | More antenna separation is needed. If you cannot provide more antenna separation and the Alert LEDs flash after the initial activation period, lower the dial above the blinking LED by 5dB (for example, from 50 to 45) and monitor the bars on your cell phone to see whether reception improves. |
| The Power LED does not turn ON. | Be sure the AC outlet is working and is not controlled by a wall switch that can cut power to the outlet. |
| The Alert LEDs flash after the initial activation period. | Lower the dial above the blinking LED by 5dB (for example, from 65 to 60) and monitor the bars on your cell phone to see whether reception has improved. |
| The Alert LEDs continue to flash. | The booster shuts down automatically, and then restarts after 60 seconds. Turn down the PCS , Cellular , or LTE/AWS dial that is oscillating to prevent the booster from shutting down automatically. |

For a list of Frequently Asked Questions and a comprehensive, up-to-date Troubleshooting Guide, please visit our website at: www.surecall.com or call us at 1-888-365-6283.

You can also consult a SureCall technical specialist directly by emailing us at support@surecall.com.

Record the model and serial number for your products:

Serial #: _____

Purchase Date: _____

Two-Year Product Warranty

SureCall warrants its products for two years from the date of purchase against defects in workmanship and/or materials.

Products returned by customers must be in their original, un-modified condition, shipped in the original or protective packaging with proof-of-purchase documentation enclosed, and a Return Merchandise Authorization (RMA) number printed clearly on the outside of the shipping container.

Buyers may obtain an RMA number for warranty returns by calling the SureCall Return Department toll-free at 1-888-365-6283. Any returns received by SureCall without an RMA number clearly printed on the outside of the shipping container will be returned to sender. In order to receive full credit for signal boosters, all accessories originally included in the signal booster box must be returned with the signal booster. (The Buyer does not need to include accessories sold in addition to the signal booster, such as antennas or cables.)

This warranty does not apply to any product determined by SureCall to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages the product's physical or electronic properties.

SureCall warrants to the Buyer that each of its products, when shipped, will be free from defects in material and workmanship, and will perform in full accordance with applicable specifications. The limit of liability under this warranty is, at SureCall's option, to repair or replace any product or part thereof which shall within TWO YEARS of purchase as determined by examination by SureCall, prove defective in material and/or workmanship. Warranty returns must first be authorized by SureCall, Inc., either in writing or by phone. Disassembly of any SureCall, Inc. product by anyone other than an authorized representative of SureCall voids this warranty in its entirety. SureCall reserves the right to make changes in any of its products without incurring any obligation to make the same changes on previously delivered products.

As a condition to the warranties provided for herein, the Buyer will prepay the shipping charges for all products returned to SureCall for repair, and SureCall will pay the return shipping with the exception of products returned from outside the United States, in which case the Buyer will pay the shipping charges.

The Buyer will pay the cost of inspecting and testing any goods returned under the warranty or otherwise, which are found to meet the applicable specifications or which are not defective or not covered by this warranty.

Products sold by SureCall shall not be considered defective or non-conforming to the Buyer's order if they satisfactorily fulfill the performance requirements that were published in the product specification literature, or in accordance with samples provided by SureCall. This warranty shall not apply to any products or parts thereof which have been subject to accident, negligence, alteration, abuse, or misuse.

SureCall makes no warranty whatsoever in respect to accessories or parts not supplied by it.

Limitations of Warranty, Damages and Liability:

EXCEPT AS EXPRESSLY SET FORTH HEREIN, THERE ARE NO WARRANTIES, CONDITIONS, GUARANTEES, OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OTHER WARRANTIES, CONDITIONS, GUARANTEES, OR REPRESENTATIONS, WHETHER EXPRESSED OR IMPLIED, IN LAW OR IN FACT, ORAL OR IN WRITING.

SURECALL AGGREGATE LIABILITY IN DAMAGES OR OTHERWISE SHALL NOT EXCEED THE PAYMENT, IF ANY, RECEIVED BY CELLPHONE-MATE, INC. FOR THE UNIT OF PRODUCT OR SERVICE FURNISHED OR TO BE FURNISHED, AS THE CASE MAY BE, WHICH IS THE SUBJECT OF CLAIM OR DISPUTE. IN NO EVENT SHALL CELLPHONE-MATE, INC. BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES, HOWSOEVER CAUSED.

All matters regarding this warranty shall be interpreted in accordance with the laws of the State of California, and any controversy that cannot be settled directly shall be settled by arbitration in California in accordance with the rules then prevailing of the American Arbitration Association, and judgment upon the award rendered may be entered in any court having jurisdiction thereof.

If one or more provisions provided herein are held to be invalid or unenforceable under applicable law, then such provision shall be ineffective and excluded to the extent of such invalidity or unenforceability without affecting in any way the remaining provisions hereof.

| Specification | TRIFLEX-A |
|---------------------------------|--------------------------------------|
| Uplink Frequency Range (MHz): | Triflex-A: 698-716/824-849/1850-1910 |
| Downlink Frequency Range (MHz): | Triflex-A: 728-746/869-894/1930-1990 |
| Supported Standards: | Triflex-A: GSM, HSPA(+), LTE |
| Input/Output Impedance: | 50Ω |
| Average Gain: | 65dB |
| Noise Figure: | 5dB |
| VSWR: | ≤2.0 |
| AC Power Transmitter: | Input AC110V, 60Hz; Output: DC 9-20V |
| Maximum Output Power: | 1 Watt EIRP |
| Cable: | CM400 |
| RF Connectors: | N Female (both ends) |
| Power Consumption: | <20W |
| Dimensions: | 8.5" x 6.25" x 1.5" |
| Weight: | 3 lbs. |
| FCC ID (USA): | RSNTRIFLEX-A |

This is a CONSUMER device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed at least 20 cm (8 inches) from any person. You **MUST** cease operating this device immediately if requested by the FCC or a licensed wireless service provider.

WARNING: E911 location information may not be provided or may be inaccurate for calls served by using this device.



48346 Milmont Drive
Fremont, California 94538
USA
888.365.6283
Fax: 510.996.7250

www.surecall.com

SureCall has made a good faith effort to ensure the accuracy of the information in this document and disclaims the implied warranties of merchantability and fitness for a particular purpose and makes no express warranties, except as may be stated in its written agreement with and for its customers.

SureCall shall not be held liable to anyone for any indirect, special or consequential damages due to omissions or errors. The information and specifications in this document are subject to change without notice.

Copyright © 2014. All Rights Reserved.

All trademarks and registered trademarks are the property of their respective owners.

SureCall Triflex User Guide
January 17, 2014

TRIFLEX (20130228) V1.2